


**Global Vision Flow Meters**

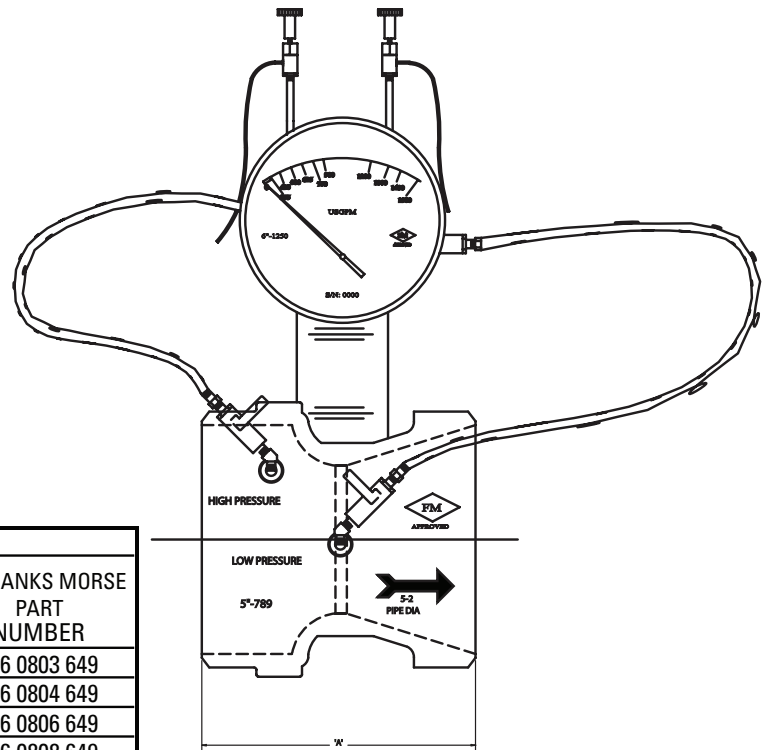

NOMINAL FLOW RATE G.P.M.	PIPE SIZE	BUTT-WELD		
		OPTION NUMBER	"A" DIM.	FAIRBANKS MORSE PART NUMBER
150	3	91AED	4.000	366 0803 649
200	3	91AEE	4.000	366 0804 649
250	4	91AEG	5.375	366 0806 649
300	4	91AEJ	5.375	366 0808 649
400	4	91AEK	5.375	366 0809 649
450	4	91AEL	5.375	366 0810 649
	5	91AEM	6.000	366 0811 649
500	5	91AEP	6.000	366 0813 649
	6	91APC	7.000	366 0814 649
750	5	91APB	6.000	366 0815 649
	6	91APA	7.000	366 0816 649
1000	6	91APD	7.000	366 0817 649
	8	91AFB	7.250	366 0818 649
1250	6	91AFC	7.000	366 0819 649
	8	91AFD	7.250	366 0820 649
1500	8	91AFE	7.250	366 0821 649
	10	91AFF	8.000	366 0822 649
2000	8	91AFG	7.250	366 0823 649
	10	91AFH	8.000	366 0824 649
2500	8	91AFJ	7.250	366 0825 649
	10	91AFK	8.000	366 0826 649
	12	91AFL	12.000	366 0827 649
3000	8	91AFM	7.250	366 0828 649
	10	91AFN	8.000	366 0829 649
	12	91AFP	12.000	366 0830 649
3500	10	91AFR	8.000	366 0831 649
	12	91AFT	12.000	366 0832 649
4000	10	91AFW	8.000	366 0833 649
	12	91AGA	12.000	366 0834 649
4500	10	91AGB	8.000	366 0835 649
	12	91AGC	12.000	366 0836 649
5000	12	91AGE	12.000	366 0838 649

**NOTES:**

1. ACCURACY IS APPROXIMATELY 2%.
2. FLOWMETER IS GLOBAL VISION INCORPORATED VENTURI TYPE RATED FOR 500 PSI WITH BUTT-WELD, GROVVED, OR CLASS 300 FLANGED CONNECTIONS AND FOR 275 PSI WITH CLASS 150 FLANGED CONNECTIONS.
3. PROPER OPERATION REQUIRES THAT MINIMUM DISTANCES OF STRAIGHT PIPE RUNS BE MAINTAINED BOTH UPSTREAM AND DOWNSTREAM FROM FLOWMETER. REFER TO MANUFACTURER'S INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION.
4. METER RANGE IN 50% TO 200% OF NOMINAL FLOW. DIAL IS DIRECT READING IN G.P.M. AND L.P.M. FOR THE SPECIFIED RANGE.
5. PART NUMBER INCLUDES COMPLETE ASSEMBLY OF VENTURI, 4" DIAMETER DIAL AND INTERCONNECTING HOSES.
6. EACH ASSEMBLY TO BE INDIVIDUALLY BOXED, WITH THE AURORA PART NO. CLEARLY MARKED ON THE OUTSIDE OF THE BOX.